

1、SPECIFICATIONS:

Current Rating : 3.0 A  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstand Voltage : 1000V AC/minute  
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy  
 Contact Plating : Gold/Tin Plated over Ni  
 Insulator Material : PA6T BK (UL94V-0)  
 Max Processing Temp : 230° C for 30 Seconds  
 260° C for 5~10 Seconds

Ordering Informations

2413 XX X N XX D X XXX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 2413 Pin Header- 2.54 Three Row Series (02-5MM)
- ② XX NO. of Contacts Per row 02~20Pin 02~10P
- ③ X Insulator Material A=PT C=PA6T D=PA9T F=I<sup>2</sup>
- ④ N Posts #=With Posts
- ⑤ XX Contact Plated G=Gold Flash G0=08μ" gold G1=10μ" Gold G5=10μ" Gold S=TiN Plated .....
- ⑥ D Mounting Type D=DIP R=Right Angle M=SMT Z=Recombent U=Type
- ⑦ X Packing O=Pe Bag T=tube A=Tray P=Wyar-Tube Re=Reel-CAP M=Var-Reel .....
- ⑧ XXX Serial NO. 001 001'999





**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

物料编号 PART NO.	2413XXXXXXDXXX	物料规格 MATERIAL NO.	2.5排针 3xP 三排直针
图号 DWG NO.	20250313003	制图 DRAWING	Pop Zhong
视图 PROJECTION		审核 CHECKED	2025.03.13
		批准 APPROVED	Rebolt Luo
			2025.03.13
		单位 UNITS	MM
		比例 SCALE	N:1
		图幅 SIZE	A4

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ~~~~ ±0.30  
 .XX ~~~~ ±0.20  
 .XXX ~~~~ ±0.10  
 ANGLE ~~~~ ±5°

STANDARD	
PA	6.00
PC	3.00
H	2.50

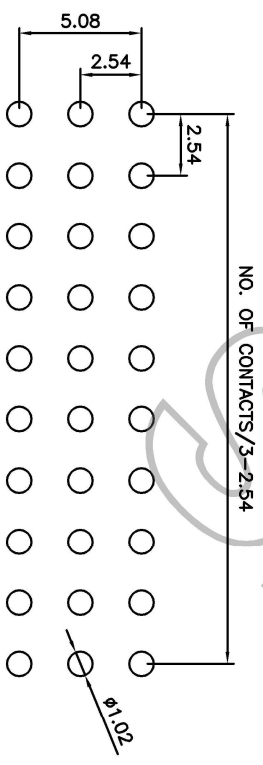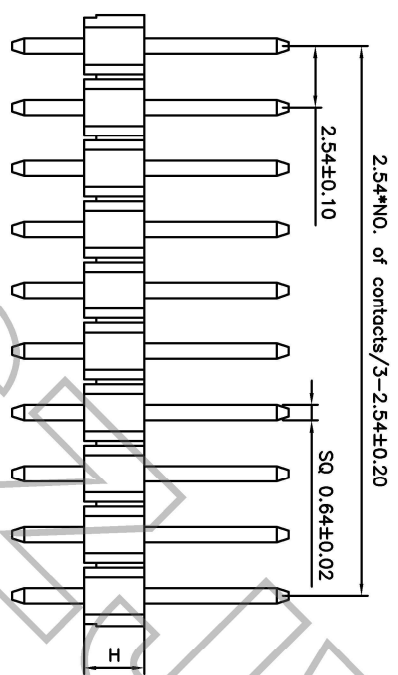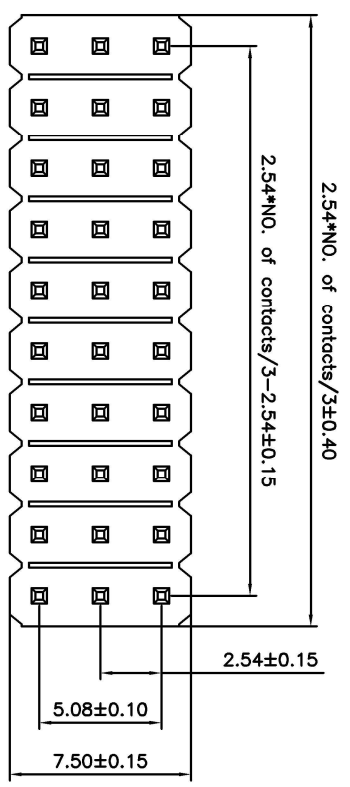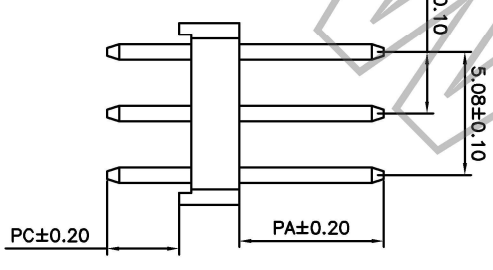

A1	210303001	优化版面	21.03.03	Pop Zhong
A0				
版本 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER
1		2		3

客户料号 CUSTOMER COPY	订货 ORDER	1 OF 1
物料规格 PART NO.	图号 DWG NO.	视图 PROJECTION
2413XXXXXXDXXX	20250313003	
物料编号 MATERIAL NO.	制图 DRAWING	审核 CHECKED
2.5排针 3xP 三排直针	Pop Zhong	2025.03.13
	批准 APPROVED	Rebolt Luo
		2025.03.13
	单位 UNITS	MM
	比例 SCALE	N:1
	图幅 SIZE	A4