

1、SPECIFICATIONS:

Current Rating : 3.0 A  
 Current Voltage : 250V AC/DC  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstand Voltage : 1000V AC/minute  
 Operation Temperature : -40° C ~ +105° C


2、MATERIALS:

Contact Material : Copper Alloy  
 Contact Plating : G/F or Tin over Ni  
 Insulator Material : PA6T BK (UL94V-0)  
 Max Processing Temp : 260±5° C for 30~60 Seconds

Ordering Informations

5011 XXX X L XX M X XX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 5011 Ejector Header 2.00 Series
- ② XXX NO. of Contacts 016=18PIN 006~064P
- ③ X Insulator Material A=PBRT C=PA6T D=PA6T
- ④ L Latch Type I=Long latch S=Short latch
- ⑤ XX Contact Plated GF=Gold Flash 30=08U" Gold GI=1U" Gold G2=2U" Gold SN=Tin Plated .....
- ⑥ M Mounting Type D=DIP R=Right angle M=SMT U=U Type O=PE Bag T=Tube A=Tray P=Polytan+Tube R=Reel+Cap M=WJar+Reel .....
- ⑦ X Packing 01 01 '99
- ⑧ XX Serial No.

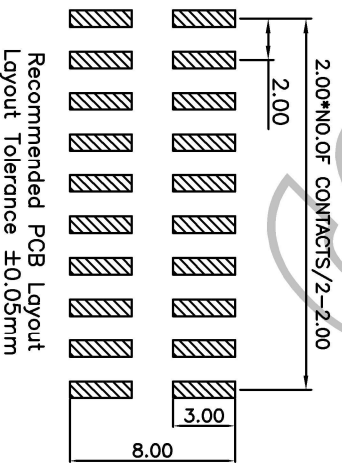

Recommended PCB Layout  
 Layout Tolerance ±0.05mm

STANDARD	
D	0.00
W	7.00

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ~~~~ ±0.30  
 .XX ~~~~ ±0.20  
 .XXX ~~~~ ±0.10  
 ANGLE ~~~~ ±5°

**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

2.0牛角 np SMT 长耳扣

品名规格 PART NO.	物料编码 MATERIAL NO.	制图 DRAWING	审核 CHECKED	批准 APPROVED	客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	投影 PROJECTION	图号 DWG NO.	图名 DESCRIPTION	变更日期 DATE	变更人 CHANGER	变更编号 ECN NO.	版本 REV NO.
	5011XXXXLXXMXXX	20220301001	Robert Luo	2025.09.20							21.03.03	Pop Zhong	210303001	A1
														A0

A1	210303001													
A0														
REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER	客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	投影 PROJECTION	图号 DWG NO.	图名 DESCRIPTION	变更日期 DATE	变更人 CHANGER	变更编号 ECN NO.	版本 REV NO.