
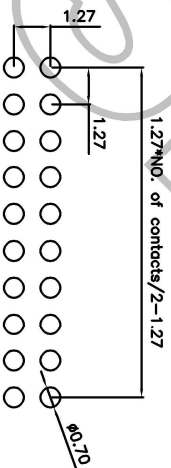
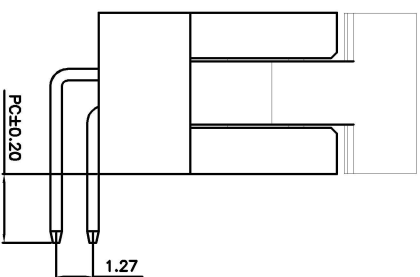
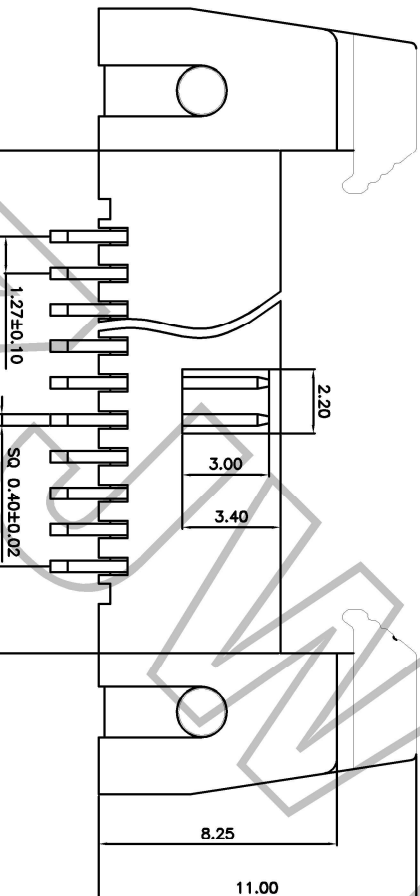


1.27*NO. of contacts/2+14.50±0.40

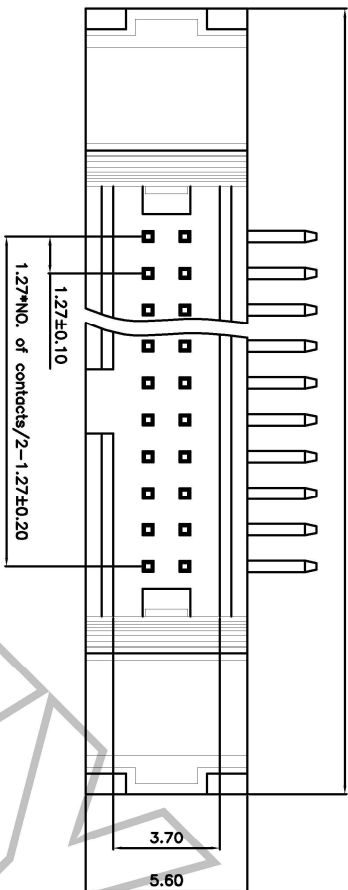

Recommended PCB Layout
Layout Tolerance ±0.05mm

1、SPECIFICATIONS:

Current Rating : 3.0 A
Current Voltage : 250V AC/DC
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstand Voltage : 1000V AC/minute
Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
Contact Plating : G/F or Tin over Ni
Insulator Material : PA6T BK (UL94V-0)
Max Processing Temp : 260±5° C for 30~60 Seconds

Ordering Informations

5111 XXX X S XX R X XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 5111 Ejector Header 1.27 Series
- ② XXX NO. of Contacts 016=18PIN 006~064P
- ③ X Insulator Material A=PBRT C=PA6T D=PA6RT
- ④ S Latch Type I=Long latch S=Short latch
- ⑤ XX Contact Plated GF=Gold Flash 30=080" Gold GI=10" Gold G2=20" Gold SN=Tin Plated
- ⑥ R Mounting Type D=DIP R=Right angle M=SMT
- ⑦ X Packing O=PE Bag T=Tube A=Tray P=Polytar+Tube R=Reel+Cap M=Water-Reel
- ⑧ XX Serial No. 01 01'99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格 1.27牛角 np 弯插 短耳扣

品名规格 PART NO.	物料编码 MATERIAL NO.	图号 DWG NO.	视图 PROJECTION	制图 DRAWING	审核 CHECKED	批准 APPROVED	Pop Zhong	2025.09.20	单位 UNITS	比例 SCALE	N:1	图幅 SIZE	A4
------------------	----------------------	---------------	------------------	---------------	---------------	----------------	-----------	------------	-------------	-------------	-----	------------	----

STANDARD
PC 2.40

21.03.03 Pop Zhong

A1	210303001	变更日期 DATE	变更人 CHANGER	CUSTOMER COPY	页码 SHEET	1 OF 1
A0				客户料号		
版本 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION				

F 1 2 3 4 5 6