
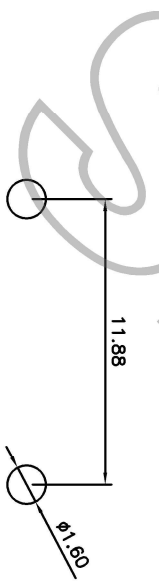


PIN	Dimension	
	A	B
1X2P	3.96	7.92
1X3P	7.92	11.88
1X4P	11.88	15.84
1X5P	15.84	19.80
1X6P	19.80	23.76
1X7P	23.76	27.72
1X8P	27.72	31.68
1X9P	31.86	35.64
1X10P	35.64	39.60

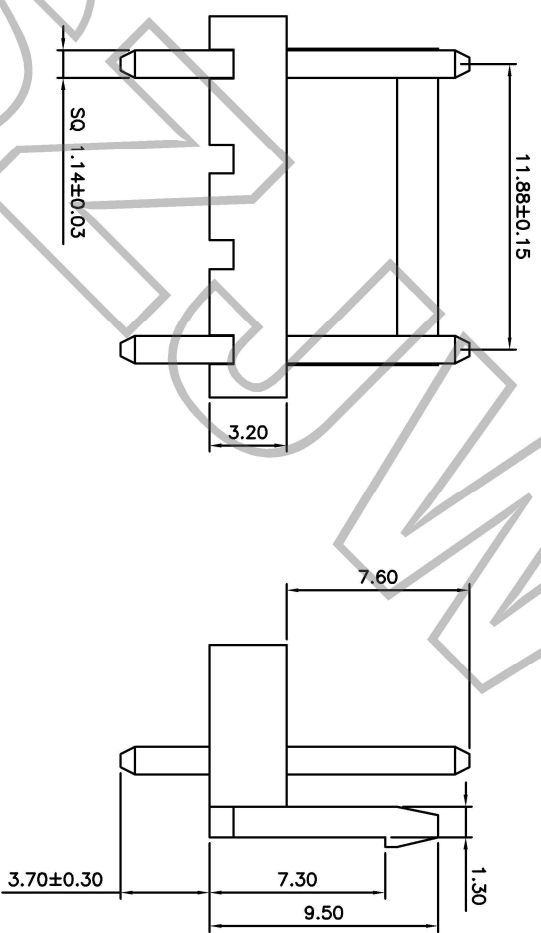

Recommended PCB Layout
Layout Tolerance±0.05mm

A1	210303001	优化版面	21.03.03	Pop Zhong
A0				
REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER
1				


TOLERANCES UNLESS OTHERWISE SPECIFIED
 .X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

物料编号 PART NO.		物料规格 MATERIAL NO.		客户料号 CUSTOMER COPY		客户料号 CUSTOMER COPY	
W396104SBSNN03		W396104SBSNN03		20250313003		20250313003	
VH3.96mm_4P_直插_PCS.7_本色_2P1X		DRAWING		CHECKED		APPROVED	
2025.03.13		Pop Zhong		Reboot Luo		2025.03.13	
MM		UNITS		SCALE		图幅 SIZE	
		N:1		A4			

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

W3961-04 S B SN N Q 3

Ordering Informations

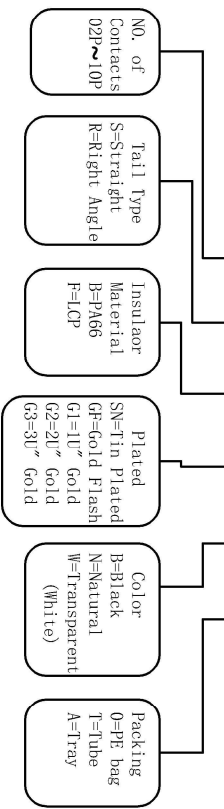

1、SPECIFICATIONS:

Rated Current : 7.0 A
 Rated Voltage : 250V AC
 Contact Resistance : 30mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 1000V AC/minute
 Operation Temperature : -25° C ~ +85° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : Gold/Tin Plated over Ni
 Insulator Material : P466 Natural (UL94V-0)
 Max Processing Temp : 180° C for 30 Seconds
 260° C for 5~10 Seconds