

1、SPECIFICATIONS:

Current Rating : 2.0 A
 Voltage Rating : 250V AC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 500V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : Gold/1in Plated over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 230° C for 30 Seconds
 260° C for 5~10 Seconds

Ordering Informations

4714 XXX C N XX D A XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 4714 BOX Header- 2.0 Series (46,4MM)
- ② XXX NO. of Contacts 006=6PIN 006~0080P
- ③ C Insulator Material C=PA6T D=PA6T F=ALP
- ④ N Posts #=Fifth Posts N=Without Posts
- ⑤ XX Contact Plated G=Gold Flash G0=0.8U" Gold G1=1U" Gold G5=10U" Gold S=TiN Plated
- ⑥ D Mounting Type D=DIP R=Right Angle M=SMT Z=Recomment
- ⑦ A Packing O=PE Bag T=tube A=Tray P=Wyar-Tube R=Reel-CAP M=Wyar-Reel
- ⑧ XX Serial NO. 01 01~99





苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格 PART NO.	2.0 贴片牛 2P 直针		
物料编码 MATERIAL NO.	4714XXXXXNXXDAXX	制图 DRAWING	Pop Zhong
图号 DWG NO.	20250313003	审核 CHECKED	2025.03.13
视图 PROJECTION		批准 APPROVED	Robert Luo
			2025.03.13
		图幅 SCALE	N:1
		图号 SIZE	A4

TOLERANCES UNLESS OTHERWISE SPECIFIED
 X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

STANDARD	PC
2.50	Pop Zhong

Recommended PCB Layout
 Layout Tolerance ±0.05mm

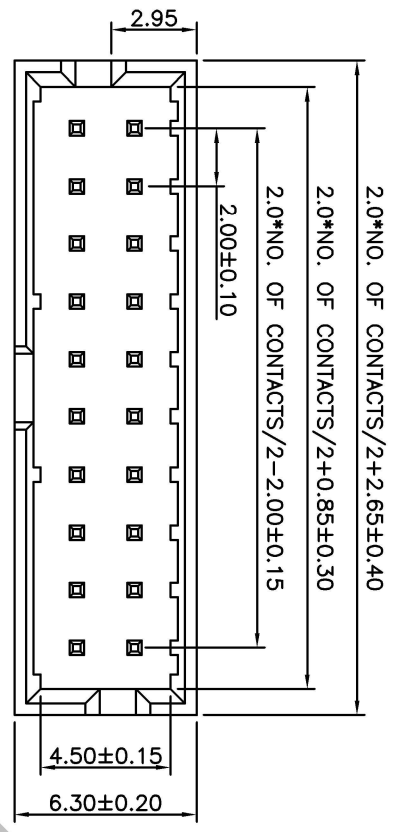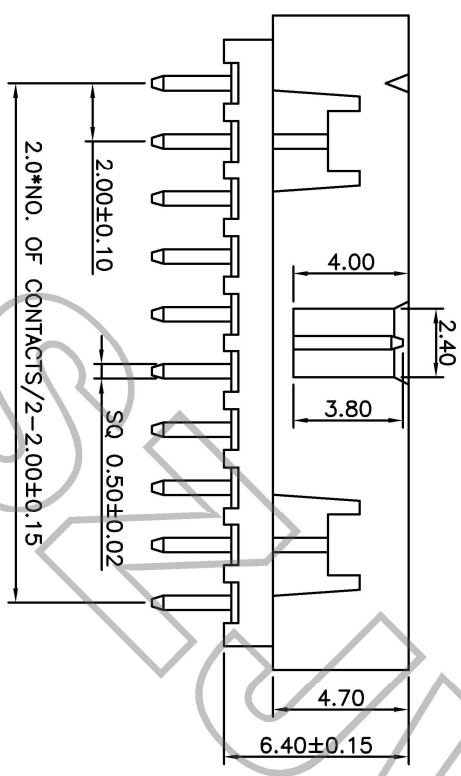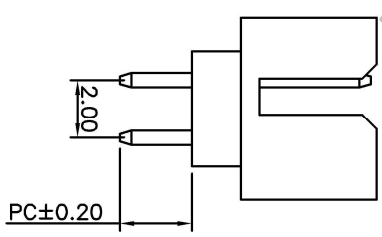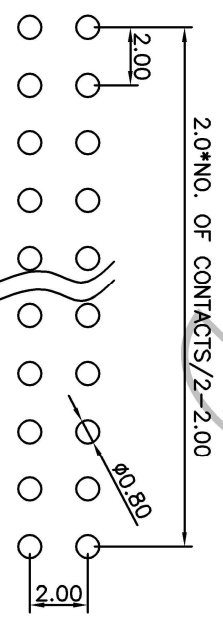

版本 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER
A1	210303001	优化版面	21.03.03	Pop Zhong
A0				

客户料号 CUSTOMER CODE	页码 SHEET	1 OF 1
-----------------------	-------------	--------

物料编码 MATERIAL NO.	4714XXXXXNXXDAXX	制图 DRAWING	Pop Zhong	单位 UNITS	MM
图号 DWG NO.	20250313003	审核 CHECKED		比例 SCALE	N:1
视图 PROJECTION		批准 APPROVED	Robert Luo	图号 SIZE	A4
			2025.03.13		