




1.27\*NO. of contacts/2+3,10±0.40

1.27\*NO. of contacts/2+1,00±0.40

1.27\*NO. of contacts/2-1,27±0.15

1.27±0.10

SQ 0.40±0.02

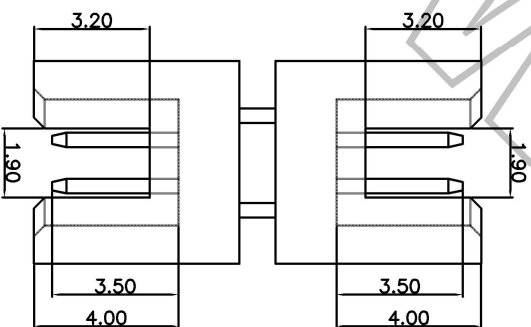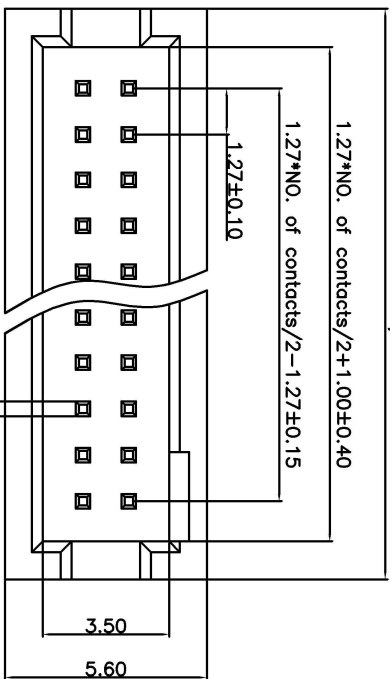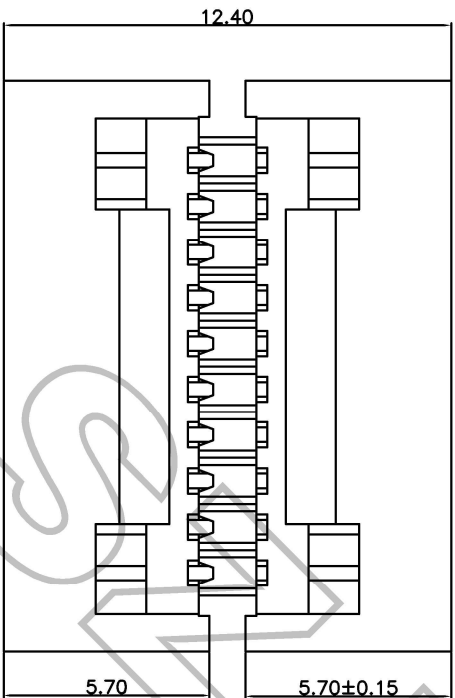

1、SPECIFICATOINS:

Current Rating : 1.0 A  
 Voltage Rating : 125V AC  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 500MΩ Min  
 Withstand Voltage : 500V AC/minute  
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy  
 Contact Plating : Gold/Tin Plated over Ni  
 Insulator Material : PA6T BK (UL94V-0)  
 Max Processing Temp : 230° C for 30 Seconds  
 260° C for 5~10 Seconds

Ordering Informations

4811 XXX C N XX T A XX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 4811 BOX Header-1.27 Series (H5.7MM)
- ② XXX NO. of Contacts 006=6PIN 008=808P
- ③ C Insulator Material C=PA6T D=PA6T F=PCP
- ④ N Posts #=With Posts N=Without Posts
- ⑤ XX Contact Plated G=Gold Flash G0=0-80° Gold G1=11° Gold G5=100° Gold S=Tin Plated .....
- ⑥ T Mounting Type D=DIP P=Right Angle M=SMT T=Transfer
- ⑦ A Packing O=PE Bag T=tube A=Tray P=Wyar-Tube R=Reel-CAP M=Wyar-Reel .....
- ⑧ XX Serial NO. 01 01~99

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ~~~~ ±0.30  
 .XX ~~~~ ±0.20  
 .XXX ~~~~ ±0.10  
 ANGLE ~~~~ ±5°

**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

物料编号 PART NO.	4811XXXCNXXTAXX	制图 DRAWING	Pop Zhong	2025.03.13	单位 UNITS	MM
图号 DWG NO.	20250313003	审核 CHECKED			比例 SCALE	N:1
视图 PROJECTION		批准 APPROVED	Robert Luo	2025.03.13	图幅 SIZE	A4

1.27英寸 单 转接

A1	210303001	优化版面	21.03.03	Pop Zhong	客户料号	订货单号	1 OF 1
A0							
版本 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER	CUSTOMER COPY	订货单号 SHEET	

F	1	2	3	4	5	6
---	---	---	---	---	---	---