

1、SPECIFICATIONS:

Current Rating : 1.0 A
 Voltage Rating : 125V AC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 500MΩ Min
 Withstand Voltage : 500V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : Gold/Tin Plated over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 260° C for 30~60 Seconds

Ordering Informations

4832 XXX C W XX M R XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① 4832 BOX Header-1.27 Series Add Insulator (Hh, 9MM)
- ② XXX NO. of Contacts 006=6PIN 006~080P
- ③ C Insulator Material C=PA6T D=PA6T F=PCP
- ④ W Posts #=Flth Posts N=Flthout Posts
- ⑤ XX Contact Plated G=Gold Flash G0=0.8U" Gold G1=1U" Gold G5=10U" Gold S=TiN Plated
- ⑥ M Mounting Type D=DIP R=Right Angle M=SMT Z=Recomment
- ⑦ R Packing O=Pe Bag T=tube A=Tray P=Mylar-Tube R=Reel-CAP M=Vlar-Reel
- ⑧ XX Serial NO. 01 01~99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格 PART NO.	1.27筒牛 0P 立雌 带柱 Hh. 9		
物料编码 MATERIAL NO.	4832XXXXCWXMRXX	制图 DRAWING	Pop Zhong
图号 DWG NO.	20250313003	审核 CHECKED	
视图 PROJECTION		批准 APPROVED	Robert Luo
			2025.03.13
		单位 UNITS	MM
		比例 SCALE	N:1
		图幅 SIZE	A4

TOLERANCES UNLESS OTHERWISE SPECIFIED
 X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

STANDARD	Pop Zhong
PB	8.50
W	5.50

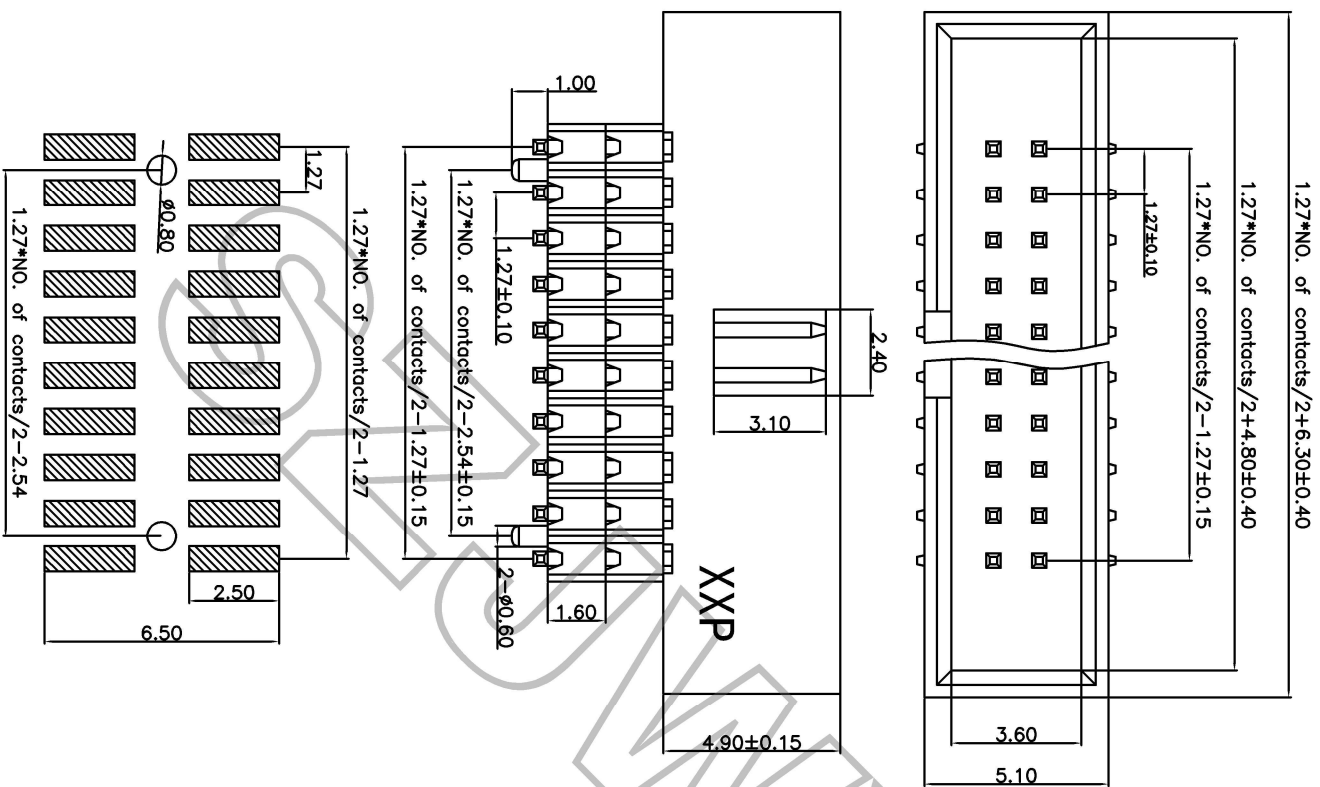

A1	210303001	优化版面
A0		
REV NO.	变更编号 ECN NO.	描述 DESCRIPTION

21.03.03	变更日期 DATE
Pop Zhong	变更人 CHANGER

客户料号 CUSTOMER CTRY	订货 SHEET	1 OF 1
-----------------------	-------------	--------

物料编码 MATERIAL NO.	4832XXXXCWXMRXX	制图 DRAWING	Pop Zhong
图号 DWG NO.	20250313003	审核 CHECKED	
视图 PROJECTION		批准 APPROVED	Robert Luo
			2025.03.13
		单位 UNITS	MM
		比例 SCALE	N:1
		图幅 SIZE	A4