


Recommended PCB Layout
Layout Tolerance ±0.05mm

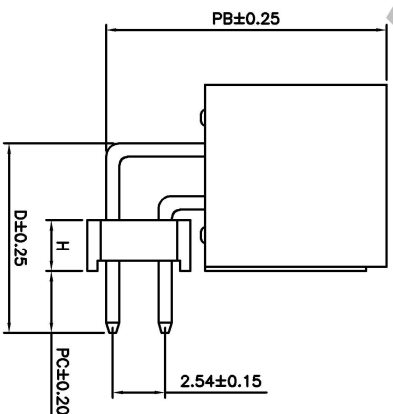

STANDARD	
PB	13.60
D	9.20
PC	3.00

TOLERANCES UNLESS OTHERWISE SPECIFIED
 X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

Ordering Informations

4622 XXX X N XX R A XX

①	4622	BOX Header- 2.54 Series Short Type Add Insulator (48, 500)
②	XX	N _{O.} of Contacts 006=6PIN 008~0084P
③	X	Insulator Material A=PBT C=PAET D=PA9T F=LP
④	N	Posts #=Flth Posts N=Flthout Posts
⑤	XX	Contact Plated G=Gold Flash G0=0.8U" Gold G1=1U" Gold G5=10U" Gold S=TiN Plated
⑥	R	Mounting Type D=DIP R=Right Angle M=SMT Z=Recomment
⑦	A	Packing O=PP Bag T=tube A=Tray P=Wyar-Tube Re=Reel-CAP M=Far-Reel
⑧	XX	Serial NO. 01 01~99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

物料编码 PART NO.	4622XXXXXXRAXX	物料名称 DRAWING	2025.03.13	物料规格 DWG NO.	20250313003	物料图 CHECKED	2025.03.13	物料图 APPROVED	2025.03.13	物料图 SCALE	N:1
------------------	----------------	-----------------	------------	-----------------	-------------	----------------	------------	-----------------	------------	--------------	-----

版本 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER	客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	物料图 PROJECTION	物料图 APPROVED	物料图 APPROVED	物料图 SCALE	物料图 SIZE
A1	210303001	优化版面	21.03.03	Pop Zhong								
A0												

1、SPECIFICATIONS:

Current Rating : 3.0 A
 Voltage Rating : 250V AC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 1000V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : Gold/Tin Plated over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 230° C for 30 Seconds
 260° C for 5~10 Seconds