
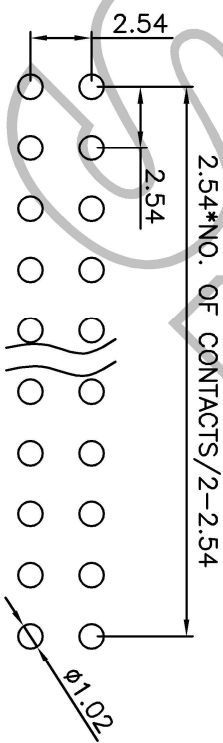
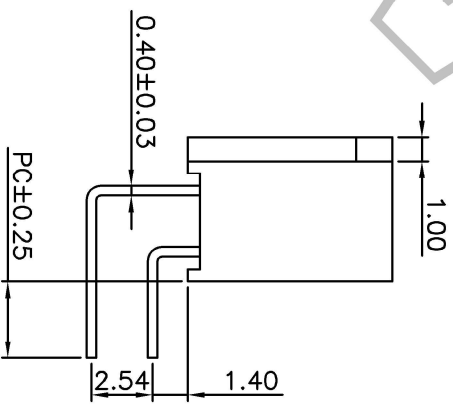
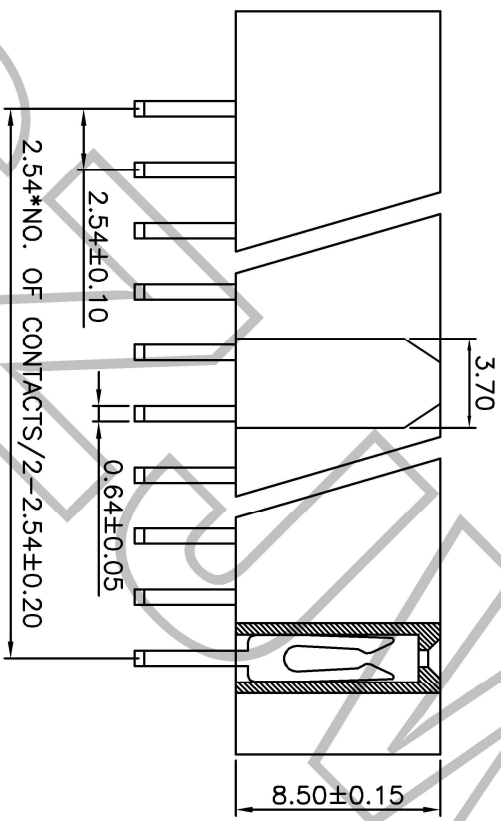


2.54\*NO. OF CONTACTS/2+0.40±0.35

2.54\*NO. OF CONTACTS/2-7.62±0.15

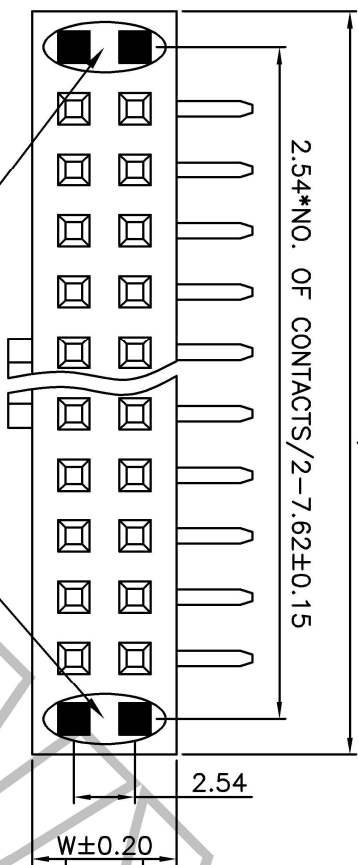

1、SPECIFICATIOINS:

Current Rating : 3.0 A  
 Current Voltage : 250V AC/DC  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstand Voltage : 1000V AC/minute  
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy  
 Contact Plating : G/F or Tin over Ni  
 Insulator Material : PA6T BK (UL94V-0)  
 Max Processing Temp : 260±5° C for 5~10 Seconds

Ordering Informations

58T12 XX X N XX R X XX

- ①
- ②
- ③
- ④
- ⑤
- ⑥
- ⑦
- ⑧

- ① 58T12 Female Header 2.54 With Bump Series H8.5mm Y\_Type
- ② XX NO. of Contacts 05=5PIN 05~10P
- ③ X Insulator Material A=PBT C=PA6T D=PA6T F=PC
- ④ N Post N=WITHOUT POSTS W=WITH POSTS
- ⑤ XX Contact Plated GF=Gold Flash G=1U" Gold SW=Tin Plated .....
- ⑥ R Mounting Type D=DIP R=Right Angle MSMT
- ⑦ X Packing T=Tube A=Tray P=Mylar+Tube
- ⑧ XX Serial NO. 01 01'99

**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

品名规格: 2.54X8.5 双排 带凸母座 2xnp\_DIP\_弯插\_Y\_TYPE  
 PART NO. 58T12XXXXNXXXXX  
 MATERIAL NO. 20230808001

图号	20230808001	制图	Pop Zhong	2023.08.08	单位	MM
DWG NO.		审核			比例	N:1
视图		批准	Robert Luo	2023.08.08	图幅	A4
PROJECTION		批准			SCALE	

A1	210303001	刷新版面	21.03.03	Pop Zhong	变更日期	变更人
A0					变更日期	变更人
REV NO.	变更编号	描述	变更日期	变更人	变更日期	变更人
ECN NO.	变更编号	描述	变更日期	变更人	变更日期	变更人
		DESCRPTION	DATE	CHANGER		

STANDARD  
PC 3.20  
刷新版面  
Recommended PCB Layout  
Layout Tolerance ±0.05mm

TOLERANCES UNLESS OTHERWISE SPECIFIED	客户料号	页码	1 OF 1
.X ~~~~ ±0.30	CUSTOMER COPY	SHEET	
.XX ~~~~ ±0.20			
.XXX ~~~~ ±0.10			
ANGLE ~~~~ ±5°			