



HIGH	PART NO.
8.50	58Y12-R
8.00	58Y22-R
7.10	58Y32-R
5.70	58Y52-R
3.50	58Y72-R

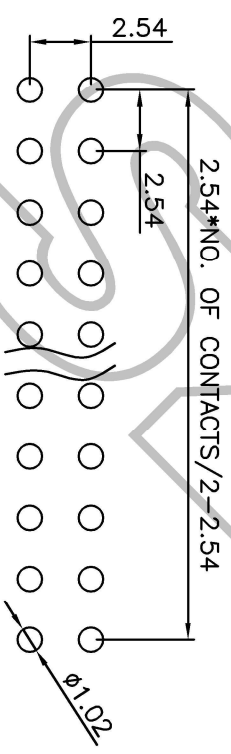

Recommended PCB Layout
Layout Tolerance ±0.05mm

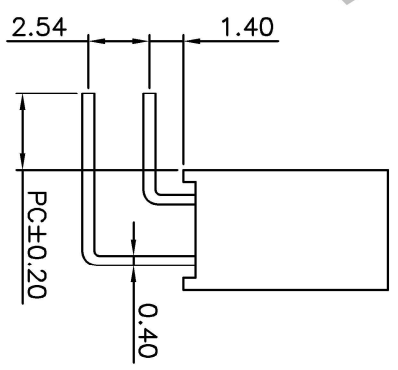

1、SPECIFICATIONS:

Current Rating : 3.0 A
 Current Voltage : 250V AC/DC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 1000V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : G/F or Tin over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 260±5° C for 5~10 Seconds

Ordering Informations

58Y12 XX X N XX R X XX

- ①
- ②
- ③
- ④
- ⑤
- ⑥
- ⑦
- ⑧

- ① 58Y12 Female Header 2.54 Series(Y_Type)
- ② XX NO. of Contacts 05=5PIN 05~10P
- ③ X Insulator Material A=PBT C=PA6T D=PA9T P=PC
- ④ N Post N=WITHOUT POSTS W=WITH POSTS
- ⑤ XX Contract Plated GF=Gold Flash G=1U" Gold SW=Tin Plated
- ⑥ R Mounting Type D=DIP R=Right Angle M=SMT
- ⑦ X Packing T=Tube A=Tray P=Mylar+Tube
- ⑧ XX Serial NO. 01 01~99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格 PART NO.	物料编码 MATERIAL NO.	制图 DRAWING	审核 CHECKED	批准 APPROVED	客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	投影图 PROJECTION
2.54双排 母座 2XnP_DIP_弯插_Y_TYPE	58Y12XXXXXXRXXX	20230808001	Robert Luo	2023.08.08				

版本号 REV NO.	变更编号 ECN NO.	描述 DESCRIPTION	变更日期 DATE	变更人 CHANGER
A1	210303001	刷新版面	21.03.03	Pop Zhong
A0				

标准 STANDARD	变更日期 DATE	变更人 CHANGER	客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	投影图 PROJECTION
PC 3.20						

单位名称 UNITS	比例 SCALE	图幅 SIZE
MM	N:1	A4