

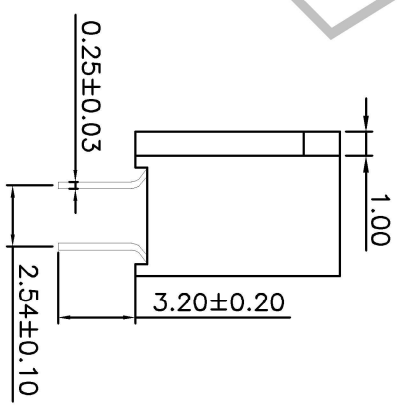
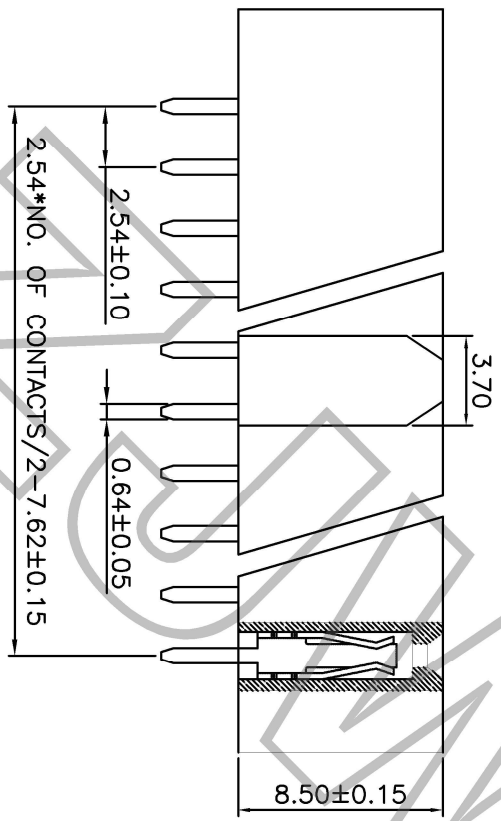


2.54\*NO. OF CONTACTS/2+0.40±0.35

2.54\*NO. OF CONTACTS/2-7.62±0.15

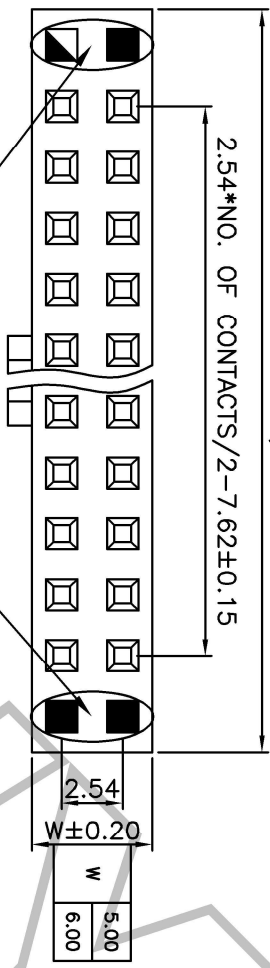

Recommended PCB Layout  
Layout Tolerance ±0.05mm

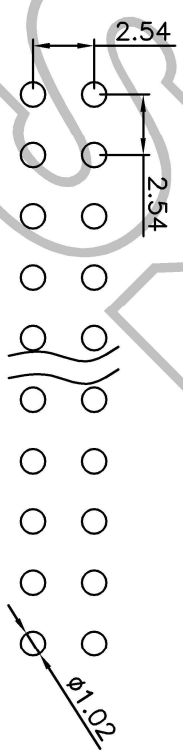

1、SPECIFICATIOINS:

Current Rating : 3.0 A  
 Current Voltage : 250V AC/DC  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstand Voltage : 1000V AC/minute  
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy  
 Contact Plating : G/F or Tin over Ni  
 Insulator Material : PA6T BK (UL94V-0)  
 Max Processing Temp : 260±5° C for 5~10 Seconds

Ordering Informations

58T12 XX X N XX D X 02

- ① 58T12 Female Header 2.54 With Bump Dual Row Series U\_Type
- ② XX NO. of Contacts Per Row 05=5PIN 05~10P
- ③ X Insulator Material A=PBT C=PA6T D=PA9T P=LCP
- ④ N Post N=WITHOUT POSTS W=WITH POSTS
- ⑤ XX Contact Plated GF=Gold Flash G=1U" Gold SW=Tin Plated .....
- ⑥ D Mounting Type D=DIP R=Right Angle M=SMT
- ⑦ X Packing T=Tube A=Tray P=Mylar+Tube
- ⑧ 02 Serial NO. 02 02\*99

**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

TOLERANCES UNLESS OTHERWISE SPECIFIED  
 .X ~~~~ ±0.30  
 .XX ~~~~ ±0.20  
 .XXX ~~~~ ±0.10  
 ANGLE ~~~~ ±5°

品名规格 PART NO.	2.54双排 带凸母座_2XnP_DIP_直插_U_TYPE		
物料编码 MATERIAL NO.	58T12XXXXXXDX02	制图 DRAWING	Pop Zhong
图号 DWG NO.	20230808001	审核 CHECKED	2023.08.08
视图 PROJECTION		批准 APPROVED	Rebolt Luo
客户料号 CUSTOMER COPY	页码 SHEET	1 OF 1	2023.08.08
变更日期 DATE	变更人 CHANGER	描述 DESCRIPTION	图幅 SCALE
刷新版面	21.03.03	Pop Zhong	比例 SCALE
210303001	A0	版本 REV NO.	N:1
变更编号 ECN NO.	1	变更日期 DATE	图幅 SCALE
1	2	变更人 CHANGER	图幅 SCALE
2	3	变更日期 DATE	图幅 SCALE
3	4	变更人 CHANGER	图幅 SCALE
4	5	变更日期 DATE	图幅 SCALE
5	6	变更人 CHANGER	图幅 SCALE
6		变更日期 DATE	图幅 SCALE