
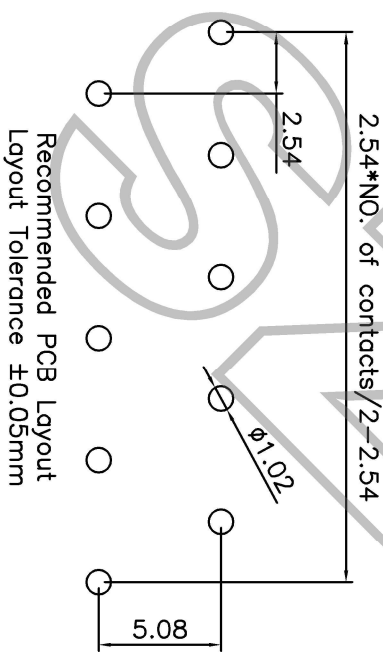


| | | |
|--------|---------|----------|
| H±0.15 | HIGH | PART NO. |
| 8.50 | 58U11-U | |
| 5.00 | 58U61-U | |
| 3.50 | 58U71-U | |



Recommended PCB Layout
Layout Tolerance ±0.05mm

1、SPECIFICATIONS:

Current Rating : 3.0 A
 Current Voltage : 250V AC/DC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 1000V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : G/F or Tin over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 260±5° C for 5~10 Seconds

Ordering Informations

58U61 XX X N XX U X XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 58U61 Female Header 2.54 Single Row Series
- ② XX NO. of Contacts Per Row 02=2PIN 02~10P
- ③ X Insulator Material A=PT C=PA6T D=PA6T P=LCP
- ④ N Post N=11H0UT POSTS W=11H POSTS
- ⑤ XX Contact Plated GF=Gold Flash G=1U" Gold SW=Tin Plated
- ⑥ U Mounting Type D=DIP U=DIP/R/A M=SMT
- ⑦ X Packing T=Tube A=Tray P=Mylar+Tube
- ⑧ XX Serial NO. 01 01'99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格
 PART NO. 2.54X5.0 单排母座_np_DIP+R/A

| | | | | | | |
|----------------------|------------------|----------------|------------|------------|-------------|-----|
| 物料编码 MATERIAL NO. | 58U61XXXXXXUXXXX | 制图 DRAWING | Pop Zhong | 2023.08.08 | 单位 UNITS | MM |
| 图号 DWG NO. | 20230808001 | 审核 CHECKED | | | 比例 SCALE | N:1 |
| 视图 PROJECTION | 第一角投影 | 批准 APPROVED | Robert Luo | 2023.08.08 | 图幅 SIZE | A4 |

刷新版面

| | | | | | |
|----|-----------|-----------------|--------------|----------------|-------------------|
| A1 | 210303001 | 版本号 REV NO. | 变更日期 DATE | 变更人 CHANGER | 描述 DESCRIPTION |
| A0 | | 变更编号 ECN NO. | | | |

TOLERANCES UNLESS OTHERWISE SPECIFIED
 .X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

| | | |
|-----------------------|-------------|--------|
| 客户料号 CUSTOMER COPY | 页码 SHEET | 1 OF 1 |
|-----------------------|-------------|--------|