
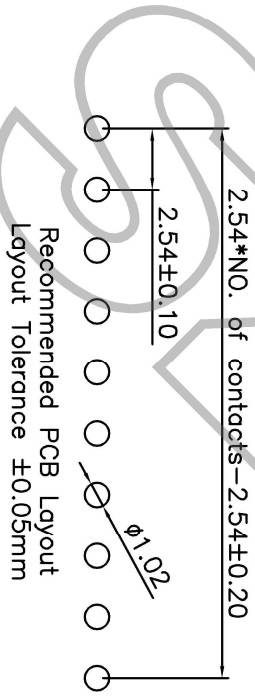


HIGH PART NO.
8.50 58Y11-D
8.00 58Y21-D
7.10 58Y31-D
5.70 58Y51-D
3.50 58Y71-D



Recommended PCB Layout
Layout Tolerance ±0.05mm

1、SPECIFICATIONS:

Current Rating : 3.0 A
 Current Voltage : 250V AC/DC
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstand Voltage : 1000V AC/minute
 Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
 Contact Plating : G/F or Tin over Ni
 Insulator Material : PA6T BK (UL94V-0)
 Max Processing Temp : 260±5° C for 5~10 Seconds

Ordering Informations

58Y11 XX X N XX D X XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 58Y11 Female Header 2.54 Single Row Series (Y_Type)
- ② XX NO. of Contacts Per Row 02=2PIN 02~10P
- ③ X Insulator Material A=PBT C=PA6T D=PA9T P=PC
- ④ N Post N=WITHOUT POSTS W=WITH POSTS
- ⑤ XX Contact Plated GF=Gold Flash G=1U" Gold SW=Tin Plated
- ⑥ D Mounting Type D=DIP R=Right Angle M=SMT
- ⑦ X Packing T=Tube A=Tray P=Mylar+Tube
- ⑧ XX Serial NO. 01 01~99

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格: 2.54X8.5_单排母座_单_DIP_直插
 PART NO. 58Y11XXXXXXDXXX
 MATERIAL NO. 20230808001

图号	20230808001	制图	Pop Zhong	2023.08.08	单位	MM
DWG NO.		审核			比例	N:1
视图		批准	Robert Luo	2023.08.08	图幅	A4
PROJECTION		批准			SIZE	

A1	210303001	刷新版面	21.03.03	Pop Zhong
A0				
版本	变更编号	描述	变更日期	变更人
REV NO.	ECN NO.	DESCRIPTION	DATE	CHANGER

STANDARD	PC	3.15
PC	3.15	

TOLERANCES UNLESS OTHERWISE SPECIFIED
 .X ~~~~ ±0.30
 .XX ~~~~ ±0.20
 .XXX ~~~~ ±0.10
 ANGLE ~~~~ ±5°

客户料号	页码	1 OF 1
CUSTOMER COPY	SHEET	