
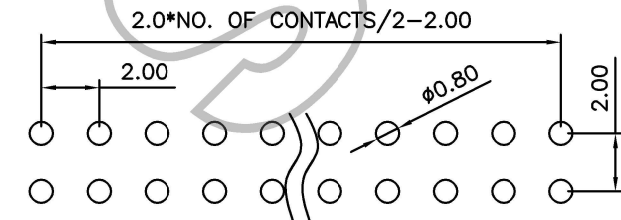


HIGH	PART NO.
2.00	3022-D
1.50	3122-D
1.00	3222-D

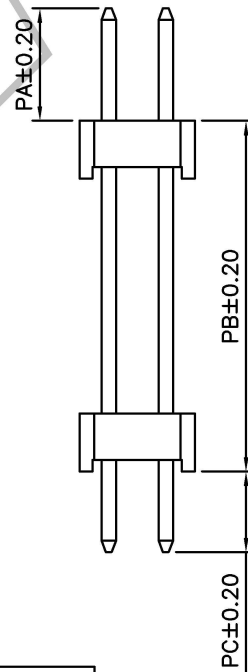

Recommended PCB Layout
Layout Tolerance ±0.05mm

STANDARD	
PA	4.00
PB	10.00
PC	2.50

TOLERANCES UNLESS OTHERWISE SPECIFIED

.X ~~~~ ±0.30
.XX ~~~~ ±0.20
.XXX ~~~~ ±0.10
ANGLE ~~~~ ±5°

1、SPECIFICATOINS:

Current Rating : 2.0 A
Voltage Rating : 250V AC
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstand Voltage : 500V AC/minute
Operation Temperature : -40° C ~ +105° C

2、MATERIALS:

Contact Material : Copper Alloy
Contact Plating : Gold/Tin Plated over Ni
Insulator Material : PA6T BK (UL94V-0)
Max Processing Temp : 230° C for 30 Seconds
260° C for 5~10 Seconds

Ordering Informations

3022 XX X N XX D X XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 3022 Pin Header: 2.0 Dual Row Series (Add Insulator)
- ② XX NO. of Contacts Per row 02=2PIN 02~40P
- ③ X Insulator Material A=PBT C=PA6T D=PA9T F=LC²
- ④ N Posts W=With Posts N=Without Posts
- ⑤ XX Contact Plated GF=Gold Flash G0=0.80" Gold SN=Tin Plated
- ⑥ D Mounting Type D=DIP R=Right Angle M=SMT Z=Recumbent
- ⑦ X Packing 0=PE Bag T=Tube A=Tray R=TAPE&REEL
- ⑧ XXX Serial NO. 001 001~999

苏州金维益电子科技有限公司
SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD

品名规格
PART NO.

2.0排针_双排双塑_2XnP_DIP_直插

物料编码
MATERIAL NO.

3022XXXXXXDXXXX

制图
DRAWING

Pop Zhang

2025.03.13

单位
UNITS

MM

图号
DWG NO.

20250313003

审核
CHECKED

比例
SCALE

N:1

A1

210303001

优化版面

21.03.03

Pop Zhang

A0

客户料号

版本
REV NO.

变更编号
ECN NO.

描述
DESCRIPTION

变更日期
DATE

变更人
CHANGER

CUSTOMER COPY

页码
SHEET

10F1

视图
PROJECTION

批准
APPROVED

批准
APPROVED

批准
APPROVED

批准
APPROVED

2025.03.13

图幅
SIZE

A4