


HIGH	PART NO.
2.00	3022-R
1.50	3122-R
1.00	3222-R

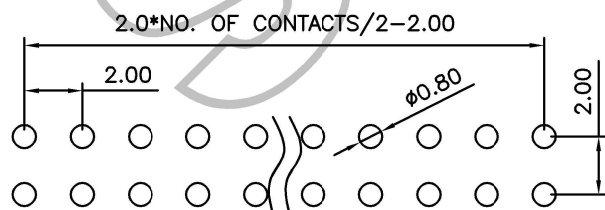

Recommended PCB Layout  
Layout Tolerance ±0.05mm

STANDARD	
PA	4.00
PB	10.0
PC	2.80
D	0.75

TOLERANCES UNLESS OTHERWISE SPECIFIED

.X ~~~~ ±0.30  
.XX ~~~~ ±0.20  
.XXX ~~~~ ±0.10  
ANGLE ~~~~ ±5°

### 1、SPECIFICATOINS:

Current Rating : 2.0 A  
Voltage Rating : 250V AC  
Contact Resistance : 20mΩ Max  
Insulation Resistance : 1000MΩ Min  
Withstand Voltage : 500V AC/minute  
Operation Temperature : -40° C ~ +105° C

### 2、MATERIALS:

Contact Material : Copper Alloy  
Contact Plating : Gold/Tin Plated over Ni  
Insulator Material : PA6T BK (UL94V-0)  
Max Processing Temp : 230° C for 30 Seconds  
260° C for 5~10 Seconds

## Ordering Informations

3022 XX X N XX R X XXX  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 3022 Pin Header: 2.0 Dual Row Series (Add Insulator)
- ② XX NO. of Contacts Per row 02=2PIN 02~40P
- ③ X Insulator Material A=PBT C=PA6T D=PA9T F=LC<sup>2</sup>
- ④ N Posts W=With Posts N=Without Posts
- ⑤ XX Contact Plated GF=Gold Flash G0=0.80" Gold SN=Tin Plated .....
- ⑥ R Mounting Type D=DIP R=Right Angle M=SMT Z=Recumbent
- ⑦ X Packing 0=PE Bag T=Tube A=Tray R=TAPE&REEL .....
- ⑧ XXX Serial NO. 001 001~999

**苏州金维益电子科技有限公司**  
**SUZHOU JINWEIYI ELECTRONICS & TECH CO.,LTD**

品名规格

PART NO.

物料编码

MATERIAL NO.

图号

DWG NO.

视图

PROJECTION

2.0排针\_双排双塑\_2XnP\_DIP\_弯插

制图

DRAWING

审核

CHECKED

批准

APPROVED

Pop Zhang

2025.03.13

Robert Luo

2025.03.13

单位

UNITS

比例

SCALE

图幅

SIZE

MM

N:1

A4

A1

A0

版本

REV NO.

变更编号

ECN NO.

描述

DESCRIPTION

变更日期

DATE

变更人

CHANGER

CUSTOMER COPY

SHEET

客户料号

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1

10F1